


Urban Panel

Jacksons Fencing

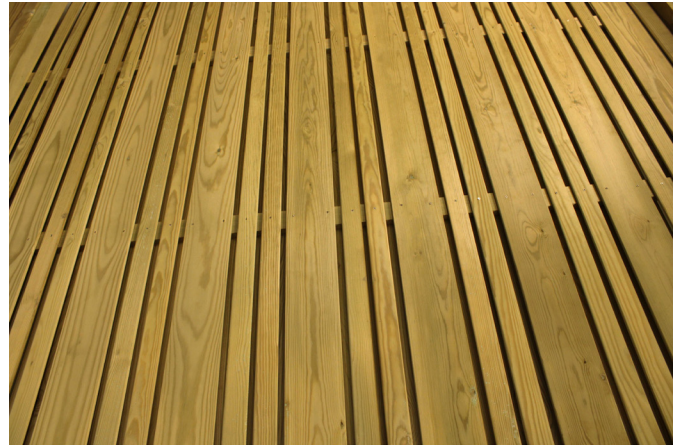

Combining wide and narrow timber pales, Urban is a contemporary panel with a distinctive design, ideal for a variety of applications. Mortice and tenoned frame for extra strength, these panels are planed all round for a smooth finish, with stainless steel fixings throughout to ensure a long life.

- All timber used throughout is superior quality Jakcure® treated softwood guaranteed for 25 years.
- All fixings are stainless steel.
- Designed for use with slotted Jakposts®.
- Morticed and tenoned frame for extra strength.
- Part of our 'good-both-sides' range.
- Panels can be rotated so the pales can run either vertically or horizontally.
- Gravel boards are required where panels are in contact with the ground.

Specification

Panel Heights: 1.83m

Panel Width: 1.83m

Thickness: 51mm

Framing: 45 x 51mm section planed.

Pales: 95 x 8mm thickness & 38 x 7mm. Planed

If you need to reduce the width of a panel on site, a cut down kit is available. Always use Jakcure® End Grain Treatment on any cut timber.

Gates

Gates are Jakcure® treated softwood, right and left hand hanging (when viewed from the outside) but are made to order. They are designed to match our Urban Panel. Non-standard gates with custom width / heights are available as a special order and are also available as pairs (size restriction applies).

- Elegantly designed to match our Urban Panel.
- Galvanised ring latch and adjustable hook and band hinges are included.
- All fixings and fittings are hot-dip galvanised or stainless steel.
- Wall plates are available for fitting these gates to walls.

Standard Gate Heights: 1.93m (plus capping).

Standard Gate Widths: 1m

View our website for Q40 specification documents, CAD drawings and products available to buy online.

A fully made to measure service is available. All Jacksons Fencing systems and gates may be designed and manufactured to suit site conditions.

Note that components can temporarily swell up to 6% in width after our Jakcure® process temporarily affecting the overall product dimensions.

